



4B 03 / 000352

Rec'd PCT/PTO
REC'D 12 MAR 2003
WIPO PCT

23 JUL 2004

#2

INVESTOR IN PEOPLE

**PRIORITY
DOCUMENT**SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

Dated

13 February 2003

An Executive Agency of the Department of Trade and Industry

BEST AVAILABLE COPY

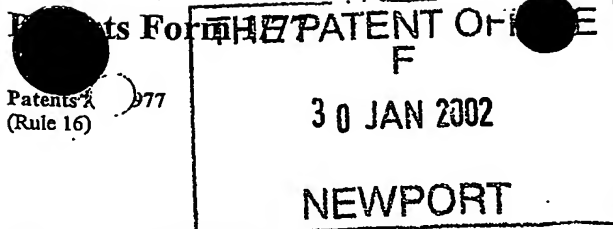

The
Patent
Office

1/77

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference 10942P1 GB/HJ

2. Patent application number
(The Patent Office will fill in this part) 0202059.2 30 JAN 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)
Reckitt Benckiser (UK) Limited
103 - 105 Bath Road
Slough
Berkshire
SL1 3UH
UNITED KINGDOM
Patents ADP number (if you know it)
If the applicant is a corporate body, give the country/state of its incorporation England 7972136002

Title of the invention Chemical Compositions and Methods

Name of your agent (if you have one) John C McKnight
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)
Reckitt Benckiser plc
Group Patents Department
Dansom Lane
HULL
HU8 7DS
UNITED KINGDOM

Patents ADP number (if you know it) 7800303001

If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)

If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application (day / month / year)	Date of filing (day / month / year)

Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

Yes

Patents Form 1/77

Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation-sheets-of-this-form

Description	11
Claim(s)	3
Abstract	1
Drawing(s)	--

If you are also filing any of the following, state how many against each item.

Priority documents	
Translations of priority documents	
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	
Request for preliminary examination and search (Patents Form 9/77)	One
Request for substantive examination (Patents Form 10/77)	One
Any other documents (please specify)	FS2

I/We request the grant of a patent on the basis of this application.

Signature

Date

John C McKnight

John C McKnight

28 January 2002

Name and daytime telephone number of Person to contact in the United Kingdom

John C McKnight (01482) 583719

Warning

For an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.

Write your answers in capital letters using black ink or you may type them.

If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

If you have answered 'Yes' Patents Form 7/77 will need to be filed.

Once you have filled in the form you must remember to sign and date it.

For details of the fee and ways to pay please contact the Patents Office.

Chemical Compositions and Methods

This invention relates to the use of dehumidifying compositions in absorbing water vapour and malodour from the interior of cavities, for example wardrobes, cupboards, drawers and shoes.

It is known to provide odour absorbing and/or sterilizing compositions for use in combating odour produced by domestic waste and by bodily fluids. In particular, domestic waste placed in bins and waste receptacles can generate significant malodour if left for any period of time, especially when the waste is organic such as food and beverage waste. Part of the malodour may be formed by gaseous compounds released from the waste material, and part of the malodour may be formed by volatile compounds within moisture present in the waste material.

Various odour controlling agents have been disclosed in the literature. Many odour-control materials have been described for use with sanitary articles such as nappies and feminine hygiene bins. US5885263 discloses compositions comprising super absorbent polymers containing boron species, which absorb moisture from waste material in the vicinity of the odour controlling composition. WO 01/52912 discloses absorbent articles, such as sanitary napkins, panty liners and nappies comprising lactic acid producing micro-organisms and odour controlling zeolite compounds which absorb malodours from waste material. WO 91/11977 discloses the use of zeolites having intermediate $\text{SiO}_2/\text{AlO}_2$ ratios to control odours in sanitary articles such as nappies and panty liners.

The odour-control compositions disclosed in the prior art discussed hereinabove comprise a malodour absorbing agent in conjunction with a moisture absorbing agent of a type which absorbs water from moist material with which it is

5 in contact.

It would be advantageous to provide a composition which absorbs malodour and water vapour, from a cavity.

10 According to a first aspect of the present invention there is provided a method of absorbing water vapour and of combating malodour within a cavity, the method comprising the step of introducing into the cavity a package comprising a wall material which retains particulate
15 contents, the contents comprising a dehumidifying compound and an odour-combating compound, the wall material being permeable to water vapour.

The term "contents" is used throughout this specification
20 to denote the mixture of the dehumidifying compound and the odour-combating compound, and any other materials, mixed therewith, within the package.

Suitably the dehumidifying compound is capable of
25 absorbing at least its own weight of water vapour. Preferably it is capable of absorbing at least twice its own weight of water vapour. The package is preferably manufactured with the dehumidifying compound in a desiccated condition. Preferably the package is kept in a
30 dry environment between manufacture and sale. For example it may be wrapped in a wrapping which is impermeable to water vapour.

The dehumidifying compound is preferably a compound with a high capacity to absorb water vapour. Its capacity to absorb standing water and water entrained in waste materials is not of significance, in this invention.

5

Preferably the dehumidifying compound comprises an inorganic compound, for example calcium chloride and/or magnesium chloride. When calcium chloride is employed it preferably comprises less than 20wt% of the total

10 contents. A preferred further dehumidifying compound, additional to calcium chloride, when needed, is magnesium chloride.

Suitably the dehumidifying compound is present in an
15 amount of at least 10wt%, preferably at least 20wt%, and most preferably at least 40wt%, of the weight of the dry (total) contents. Suitably the dehumidifying compound is present in an amount of no more than 95wt%, preferably not more than 85wt% and most preferably not more than 75wt%,
20 of the weight of the dry (total) contents.

The term "odour-combating" in this specification refers to any manner in which odour is counteracted by way of a physical or chemical action, for example by absorption,
25 suppression, neutralisation or degradation; not merely odour-masking, as a fragrance alone may achieve.

Suitable odour-combating compounds include zeolites, inorganic carbonates, clays, for example bentonite,
30 cyclodextrins and diatomaceous earths.

Suitably the odour-combating compound is present in an amount of at least 0.1wt% of the weight of the dry (total)

contents, more preferably at least 0.5wt%, most preferably at least 1wt%. Suitably the odour-combating compound is present in an amount of no more than 25wt%, preferably no more than 20wt%, and most preferably no more than 10wt% of the weight of the dry (total) contents.

Preferably the odour-combating compound is a zeolite, most preferably comprising a flowable zeolitic powder.

10 Preferably a flowable zeolitic powder comprises at least 80wt% zeolite, and preferably at least 90wt% zeolite. It may in certain useful embodiments be constituted substantially entirely by zeolite. When it is not, it may be zeolite admixed with a filler or, preferably,
15 processing aid.

In this specification references to "zeolite" are to substantially virgin zeolite, including bound water of crystallisation and any atmospherically absorbed unbound
20 water that may be present, but not including deliberately added materials. "Zeolitic powder" denotes zeolite (as just defined) and also such a material containing deliberately added material(s),

25 Definitions which refer to the weight or weight ratio of zeolitic powder are made with reference to the zeolite (as defined above) in the zeolitic powder, unless otherwise stated.

30 We believe that the invention can be applied using any type of odour-absorbing zeolite, including odour-absorbing grades of zeolite MAP, zeolite X, zeolite P and, most preferably zeolite A.

Preferably the contents further comprise a filler.

By "filler" we mean a compound which serves to increase the bulk of the composition and which, preferably, is substantially water insoluble. It may however have other functions - for example it may be a processing aid, and/or an odour-absorber and/or have water-absorbing properties and/or act as a thickener or gelling agent for the water absorbed within the package.

The filler may be an inorganic filler, for example a metal salt or metal oxide.

The filler may be an organic filler, for example a compound in the cellulose or starch families.

Suitable fillers include, for example calcium carbonate, sodium bicarbonate, cellulose or cellulose derivatives, starch or starch derivatives, anhydrous calcium sulphate, calcium oxide, silica gel, and bentonite clays.

An especially preferred inorganic filler is sodium bicarbonate.

An especially preferred organic filler is starch.

Suitably a filler (made up of one or more compounds) is present in an amount of at least 10wt%, preferably at least 20wt%, of the weight of the dry (total) contents.

Suitably a filler (made up of one or more compounds) is present in an amount of no more than 80wt%, preferably no

more than 60wt%, more preferably no more than 40wt%, of the weight of the dry (total) contents.

~~As noted above some compounds which are primarily present~~
5 as a filler may have odour-combating properties. Suitable fillers which have odour-combating properties include inorganic carbonates such as calcium carbonate, clays such as bentonite clays and silica gel.

~~However, preferred compositions comprise both a highly~~
10 effective odour-combating compound and a separate filler which may or may not also absorb some odour.

Even though some fillers also have some odour-combating
15 properties (or other beneficial secondary properties), in this invention a filler is used in conjunction with a separate odour-combating compound, and is intended primarily as a bulking material, and thus is not an "odour-combating compound" according to the invention.

20

Preferred contents of the invention comprise a compound capable of absorbing at least its own weight of moisture, especially a magnesium or calcium halide, a filler, especially starch, and an odour-combating compound,
25 especially a zeolite.

The contents may further comprise a fragrance. Many suitable fragrances are commercially available, including those designed to mask waste odours, and the choice of
30 fragrance is a matter of subjective choice. If wished a fragrance may be entrained on an absorbent material, for example on a zeolite employed as an odour-absorbing compound, in order to give slow fragrance release.

The contents may suitably be in the form of a powder, or, preferably, granules (including flakes).

- 5 The cavity mentioned above may be an enclosed cavity, for example a drawer, wardrobe, cupboard, locker, refrigerator, freezer, cool box, car boot or car passenger compartment. Preferably it is a drawer, wardrobe, cupboard or locker.

10

The cavity may be a non-enclosed cavity, for example the inside of a shoe or boot.

- 15 In the method the package is placed inside the cavity and, if the cavity has a closure, it is typically closed. The package acts to reduce the humidity of the air inside the cavity and prevent the development of musty odours.

20 The package may have a wall material which is all of semi-permeable (by which we mean permeable to water vapour and impermeable to water, that is, liquid water) membrane material or may comprise a portion which is wholly water-impermeable membrane and a portion which is of semi-permeable membrane material.

25

- In one convenient embodiment the package comprises a sachet made up of two sheets joined together around their periphery, for example by heat sealing. Preferably one sheet is of a wholly water-impermeable membrane and the
30 other sheet is of a semi-permeable membrane material.

Suitable technology for the package manufacture is described in US 6217701 and US 5935304.

Preferably the package is such that it can admit at least 500g, more preferably at least 1000g, most preferably at least 2000g water vapour/m²/day.

5

The package may have a means for indicating exhaustion. For example the contents may include a component whose colour changes when the water held by the contents reaches a certain level, indicative of exhaustion or imminent

10 exhaustion. Alternatively the package may be designed to bulge visibly when replacement is needed (whilst being designed to be safe from bursting) or otherwise to be detectable by feel, the contents becoming gel-like when
15 formulated such when replacement is required water is no longer all retained by the contents but some drips therefrom, and collects in a visible, distinct under-zone of the package. In that under-zone it may dissolve a colorant, to aid visual detection, or trigger another type
20 of signal, for example a visible or audible signal.

In accordance with a further aspect of the present invention there is provided a package comprising a wall material which retains particulate contents, the contents
25 comprising a dehumidifying compound and an odour-combating compound in admixture, the wall material being permeable to water vapour.

The package is suitably in the form of a pouch or sachet.
30 For certain embodiments it may be provided with a hook, for hanging within the cavity.

In accordance with a further aspect of the present invention there is provided a particulate composition comprising a dehumidifying compound and an odour-combating compound in admixture.

5

The invention will now be described by way of the following, non-limiting examples.

Example 1

10

In this example the contents of a sachet to be hung in a wardrobe were as follows:

	Magnesium chloride in flake form (staple source)	51wt%
15	Calcium chloride in flake form (Tokuyama)	18wt%
	Potato starch in powder form (Nichiden Chemical)	24.9wt%
	ZEOCROS E100 (zeolite, Ineos Silicas)	5wt%
	ACTICIDE NC preservative (Thor Specialties)	0.1wt%
	Microencapsulated fragrance	1.0wt%

20

These materials were mixed in a tumbler mixer. 55g portions were sandwiched between two rectangular sheets of plastics materials, heat sealed together around their edges, one sheet being polyethylene impermeable to water and water vapour and the other being of semi-permeable
25 TYVEK membrane material from Du Pont, formed from fine HDPE fibres. The water-vapour permeability in this embodiment is about 2000-4000g/m²/day.

30 A plastics hook was adhered to the package to enable it to be hung inside a wardrobe.

When the sachet approaches saturation the contents become gel-like. This condition is easy to detect manually.

-----In a similar example 27g portions of the same material-----
5 were employed, between smaller sheets of the same plastics materials. These smaller packages are for use in drawers.

Example 2

10 In this example the contents of a pouch to be placed inside a shoe were as follows:

	Magnesium chloride in flake form (staple source)	40wt%
	Potato starch in powder form (Nichiden Chemical)	38.9wt%
15	Sodium bicarbonate (staple source)	10wt%
	ZEOCROS E100 (zeolite, Ineos Silicas)	10wt%
	ACTICIDE NC (Thor Specialties)	0.1wt%

These materials were mixed in a tumbler mixer. 100g
20 portions were entrapped between two rectangular sheets of plastics material, heat sealed together around their edges, one sheet being of polypropylene impermeable to liquid water and water vapour and the other being semi-permeable TYVEK membrane material. The water vapour
25 permeability in this embodiment is about 2000-4000g/m²/day.

In use, the pouch is placed in a shoe which is damp from wear and/or which requires storage. When approaching
30 saturation the contents became gel-like, easily detected by feel.

ZEOCROS E100, ACTICIDE NC and TYVEK are believed to be trade marks.

Claims

1. A method of absorbing water vapour and of combating
----- ~~malodour within a cavity, the method comprising the~~
5 step of introducing into the cavity a package
comprising a wall material which retains particulate
contents, the contents comprising a dehumidifying
compound and an odour-combating compound, the wall
material being permeable to water vapour.
- 10
2. A method as claimed in claim 1, wherein the
dehumidifying compound is capable of absorbing at
least its own weight of moisture.
- 15 3. A method as claimed in claim 1 or 2, wherein the
dehumidifying compound is a water absorbing metal salt
or oxide.
- 20 4. A method as claimed in claim 3, wherein the
dehumidifying compound is selected from calcium
chloride and magnesium chloride.
5. A method as claimed in any preceding claim, wherein
the dehumidifying compound is present in an amount of
25 at least 10wt% of the weight of the dry contents.
6. A method as claimed in any preceding claim, wherein
the dehumidifying compound is present in an amount of
no more than 95wt% of the weight of the dry contents.
- 30 7. A method as claimed in any preceding claim, wherein
the odour-combating compound is a zeolite.

8. A method as claimed in any preceding claim, wherein the odour-combating compound is present in an amount at least 0.5wt% of the weight of the dry contents.
- 5 9. A method as claimed in any preceding claim, wherein the odour-combating compound is present in an amount of no more than 25wt% of the weight of the dry contents.
-
- 10 10. A method as claimed in any preceding claim, wherein the composition further comprises a filler.
11. A method as claimed in claim 10, wherein the filler comprises starch or a starch derivative.
- 15 12. A method as claimed in claim 10 or 12, wherein the filler constitutes at least 10wt% of the weight of the dry contents.
- 20 13. A method as claimed in any of claims 10 to 12, wherein the filler constitutes no more than 80wt% of the weight of the dry contents.
14. A method as claimed in any preceding claim, wherein the contents further comprise a fragrance.
- 25 15. A method as claimed in any preceding claim, wherein the cavity is the interior of an article of footwear or a storage space within an article of furniture.
- 30 16. A package comprising a wall material which retains particulate contents, the contents comprising a dehumidifying compound and an odour-combating compound

in admixture, the wall material being permeable to water vapour.

----- 17. A particulate composition comprising a dehumidifying
5 compound and an odour-combating compound in admixture.

18. A method of absorbing water vapour and combating
malodour within a cavity, or a package or particulate
composition for the same purpose, substantially as

10 described herein.

ABSTRACT

Chemical Compositions and Methods

5.

The invention relates to a method of absorbing water vapour and malodour from a cavity, for example a drawer or wardrobe or the inside of a shoe. This is achieved by placement in the cavity of a package permeable to water

10 vapour and retaining a particulate dehumidifying compound
and a particulate odour-combating compound.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.